

INSTALLATION INSTRUCTIONS

000-8J-D03

MX-5

INDOOR CAR COVER

PACKAGE CONTENTS



COVER (QTY1)



STORAGE BAG (QTY1)

TOOLS REQUIRED

NO TOOLS REQUIRED

0 BEFORE INSTALLATION

- Read entire installation instructions before proceeding.
- Be careful not to damage any antenna or mirror pocket area when installing cover.
- Watch for any sharp objects on vehicle that may rip the cover. You may reinforce such areas exposed to severe abrasion, using cloth reinforcement or Mystic brand tape. This will help extend the use of your cover.

**This cover is intended and designed for indoor use only.*

2 LAY COVER OVER THE CENTER OF VEHICLE AND OPEN.

The MX-5 logo will be visible on the front of the vehicle cover.



4 INSTALL COVER OVER FRONT AND REAR BUMPERS


Elastic at each end of the cover will keep cover in place under normal conditions.

PRECAUTION: DO NOT ATTEMPT TO MOVE OR DRIVE VEHICLE WITH COVER IN PLACE



1 VEHICLES WITH MOUNTED ANTENNAS

- To remove the antenna, carefully unscrew the mast from its base by turning it counterclockwise.
- To re-install antenna, carefully screw mast into its base by turning it clockwise. Be sure not to cross tread when installing.

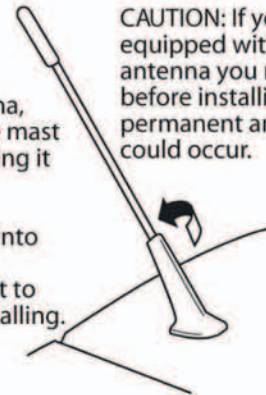

CAUTION: If your vehicle is equipped with a mounted antenna you must remove it before installing car cover or permanent antenna distortion could occur.

3 IF THE VEHICLE COVER IS EQUIPPED WITH MIRROR POCKETS

The mirror pockets must be covered before the rest of the cover is applied over the bumpers. This is very important for the fit of the cover, and makes installation easier in windy conditions.



5 REMOVAL

- The following procedure makes it easier to remove and install the cover whenever it is used.
 - Release both ends of the cover from under the bumpers.
 - Fold up both sides of the cover onto the top of the vehicle into a long pile approximately 2 or 3 feet wide.
 - Start at the front of the vehicle and fold the cover from the front to the back.
 - Store cover in storage bag.

6 CLEANING:

Precaution: Do not attempt to move or drive vehicle with cover in place.

Cleaning **Satin Stretch®** fabric:

Satin Stretch® fabric is a strong durable polyester fabric which resists common stains, soil, mildew, and rot. Light brushing with a soft cloth will remove most dirt. Mud can usually be rinsed out. The fabric does not require harsh scrubbing to remove dirt and stains.

For Persistent Soiling:

- A. Wet soiled fabric area with water.
- B. Wash area with a mild, non-detergent soap such as Ivory® soap. Work in a lather with a sponge, lightly working the lather into the soiled areas.
- C. Rinse thoroughly with large amounts of water to remove any residual soap.
- D. Air-dry completely (a minimum of 6 to 8 hours).

7 REPAIR:

Repairing Rips, Tears, and Holes:

Satin Stretch® fabric can be repaired in any of the following methods.

- Accidental small rips in **Satin Stretch®** fabric can be easily repaired with tape, RIPair® or Kenyon repair tape.
- Punctures may be sealed with Shoo Goo II® (available at most sporting goods stores, discount and department stores).
- Larger holes may be repaired easily by stitch patching with **Satin Stretch®** fabric. When stitch patching, treat stitching with a seam sealer such as Kanyon Kote 1® Seam Sealer® in a tube with a fine-tip applicator. Seal only from the outside and be sure that the sealer penetrates deeply in all needle holes. Patches may also be glued on using Shoo Goo®. Be sure when gluing that the Shoo Goo® is used around the entire edge of the patch to ensure a waterproof seal. Allow sufficient curing time (follow Shoo Goo instructions carefully).

8 WARNING TO OWNERS OF REPAINTED VEHICLES

Use of a cover on any recently painted surface may cause damage to that surface! If your vehicle has been repainted within the last 6 months, check with the painter or body shop on the specifics of how and when you can use this cover.

MX-5